

Galvanised Steel
Top and Bottom
Sheet with Vinyl
Covering



Panel Grade	Point Load 25x25mm	Load Over 300x300mm	UDL	Panel Thickness (Nominal)	System Weight (Typical)
Heavy	4.5kN	N/A	12.0kN/m ²	41mm	45kg/m ²

BEH600V Heavy Grade Panel

This panel consists of a sandwich construction with a high grade 38mm chipboard core with steel top and bottom sheet which is then covered with our standard Gerflor Mipolam EL7 Vinyl or other customer approved. This is all edged with a full depth PVC band creating a fully encapsulated panel to be loose laid with complete electrical continuity.

Certification

The panel has been fully tested by a NAMAS accredited laboratory to the MOB PSA PF2 PS/SPU March 1992 Heavy Grade specification and is certified as being fully compliant. All PSA panels have a 3 times working load safety factor, class '0' spread of flame resistance and 25year guarantee.

Finish

All of our edge banded panels can have a wide range of factory bonded finishes that include wood, ceramic tile and high pressure laminate & vinyl and any panels with a factory bonded finish can be perforated for air flow. Whatever your requirements, Permaflor will have the flooring solution to suit you.

Manufacture

All panels are manufactured in our new facility in the UK, which allows us to offer total flexibility whilst maintaining the highest possible quality standard and ensures fast reaction and a reliable service. Materials used are sourced from high quality suppliers and use renewable, sustainable sources and suppliers wherever possible. We can also offer a bespoke service and specialise in replicating and reproducing existing raised floors.

Accessories

Accessories include ramps, steps, handrails, subfloor seal, fire barrier, grilles, up stands, perforated panels, air leakage control, bridging, stringers, service outlets, cavity barrier and lifting tools.


FULL DETAILS AVAILABLE ON REQUEST

Permaflor

1 Fir Tree Lane
Hereford HR2 6LA
United Kingdom

☎: +44 (0)1423 347722
☎: +44 (0)1432 347 730
✉: sales@permaflor.co.uk
🌐: www.permaflor.co.uk

Permaflor
access flooring solutions

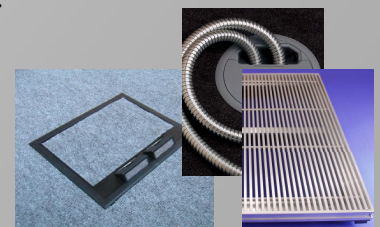

For further information **Call: 01432 347722**